

JULY 2018



THERMAL Receipt Printer

This thermal receipt printer is a second generation NP class printer and is compatible with most popular POS software applications, many POS systems and fits a wide variety of mini-printer applications.

- Energy star certified – Superior efficiency reduces energy costs & carbon footprint
- Extraordinary reliability 3 year bumper-to-bumper warranty
- Gray scale, 2 color & watermark print capable
- 230mm per second print speed
- Dual interface standard – USB interface is on the main board
- Stores/prints coupon and logo images
- Prints watermarks

Auto
Cut




Multiple
Languages



Lw Carbon
Footprint



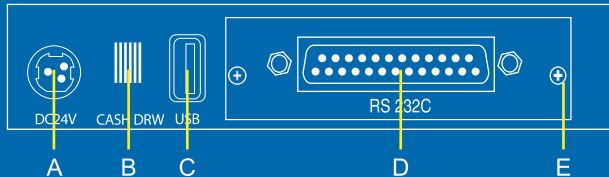

Model Name	Thermal Top Feed Receipt Printer
Print Speed	230mm per Second / 63 Lines per Second
Characters Per Line	Font A: 42 (80mm) / 37 (58mm), Font B: 56 (80mm) / 49 (58mm)
Character Size	Font A: 12x24, Font: B 9x17
Paper Roll Type	Width: 82.5±0.5mm, 80.0±0.5mm, 76.0±0.5mm, 5.0±5.75mm, 5.0±5.96mm Maximum Diameter: 83mm Paper Thickness: .06mm ~ 0.1mm
Reliability	MTBF: 360,000 Hours, MCBF: 60,000,000 Lines Printhead life: >_ 150 KM, Cutter life: 1,800,000 cuts
Character Set	Alphanumeric: 95 Graphic: 128x56 International: Traditional Chinese, Simplified Chinese, Japanese, Korean and more (optional)
Barcode	1D: UPC-A / UPC-E / JAN8 (EAN8) / JAN13 (EAN13) / Code39 / Code93 / Code128 / ITF / CODABAR 2D: PDF417 / QR / MaxiCode / GS1 Databar
Interpreter	ESC/POSTM
Interface	USB, Serial/USB, Parallel/USB, Ethernet/USB, WiFi/USB
Driver	Windows® POSReady 2009 / Windows 7 32 & 64 bit / Server 2008 32 & 64 bit / Vista 32 & 64 bit / Server 2003 32 & 64 bit / XP Professional 32 & 64 bit / 2000 Server / 2000 Professional / Linux CUPS / MAC / OPOS
Drawer Port	2 Port (+24VDC) with Drawer Compulsion
Data Buffer	Receive Buffer: 4 KB RAM Selectable to 64 KB; NV Bit Image Data: 128 KB; User NV Memory: 512 KB
Power Supply	AC 100 ~ 240 V, 50/60 Hz Adapter Included
Current/Power Usage	2.0A / 60W
Operating Temperature	40Å° ~ 114Å°F (5Å° ~ 45Å°C)
Operating Humidity	20% ~ 90% RH (Non-Condensing)
Paper Cutting Method	Auto-Cutter - Selectable Full or Partial Cut
Dimensions	5-3/4"W x 5-11/16"H x 7-5/8"D
Shipping Weight	3.175 Kg (7lbs)
Safety and EMI	FCC, RoHS
Optional Devices	Powered USB Cable, Spill Cover, Power Supply Cover, Serial, Parallel, USB, Ethernet or Wireless WiFi Interface Boards available, Audio/Visual Print Messenger - For noisy kitchens Alarm sounds and light flashes when a new order is printed
Ports & Connectivity	A: DC 24V Power-In B: Cash Drawer C: USB D: Choice of Serial (Shown), Parallel, USB, Ethernet or Wireless WiFi Interface Boards available E: Cable Management Clip

sales@gravityaustralia.com.au
 1300 832 876
 U5, 63-71 Boundary Rd, North Melbourne,
 Victoria 3051, Australia