

RETAIL PRINTING SCALE SERIES

Packing many features into a compact, ergonomic system that makes transactions simple, our series of retail scale printers are robust and reliable.

- Large color touchscreen
- Dual-range weighing (0-15 lb x 0.005 lb/15-30 lb x 0.01 lb)
- Internal wireless communications
- Ethernet communications
- Up to 99 pages of speed keys
- Adjustable touchscreen viewing angle
- 77 tactile keys
- 4 MB of memory
- Grayscale LCD customer-side display
- Self-serve mode/operation
- 30+ selectable fixed bar code formats
- Compatible with third-party communication software, including Invatron's PLUM and ADC's InterScale



POLE DISPLAY MODEL




ELEVATED KEYBOARD MODEL




BENCH MODEL


ELEVATED KEYBOARD MODEL

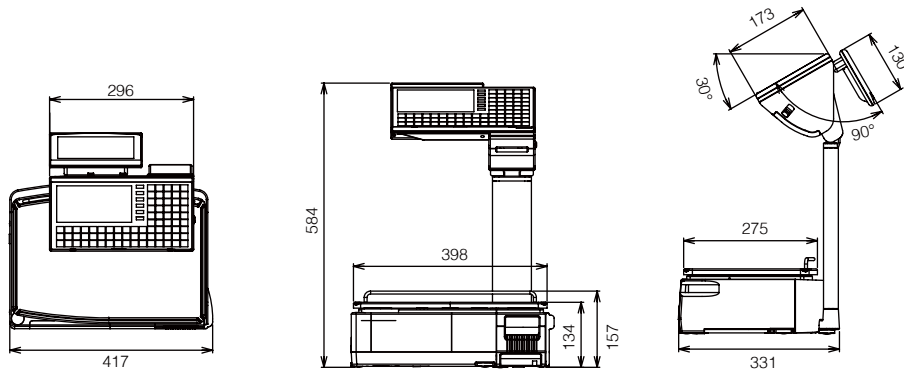

POLE DISPLAY MODEL

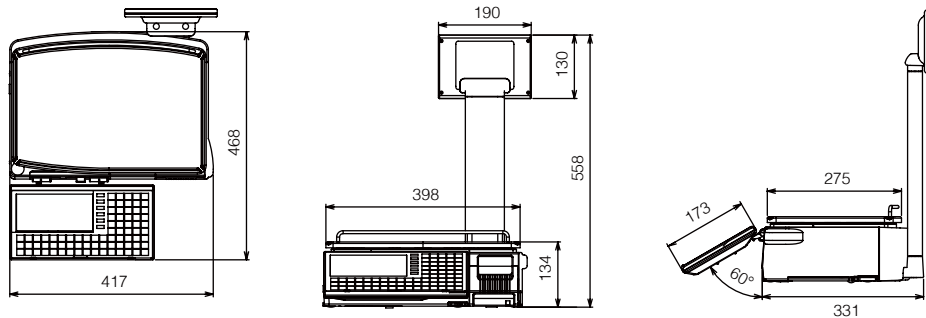

BENCH MODEL

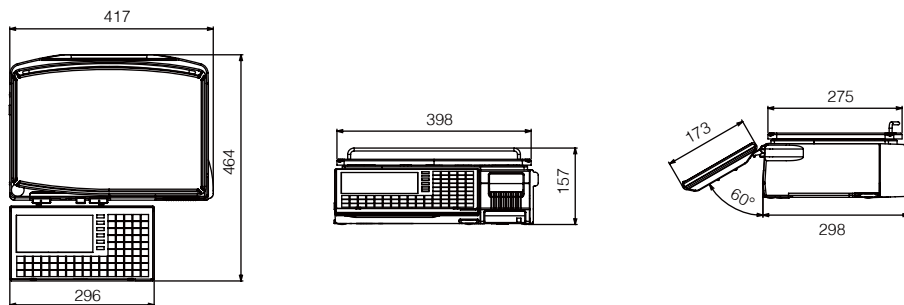

sales@gravityaustralia.com.au
1300 832 876

U5, 63-71 Boundary Rd, North Melbourne,
Victoria 3051, Australia

RETAIL PRINTER SCALE TECHNICAL SPECIFICATIONS

WEIGHT RANGES		
Maximum Capacity	6/ 15k	15/ 30kg
Division	2/ 5g	5/10g
Min.	40g	100g
Tare	5.998kg	14.998kg
PRINTER		
Resolution	8 dots/ mm	
Speed	80/ 100/ 120/ 150 mm/sec	
Image printing	Max. 3 label format	
Barcodes	EAN/UPC 8/12/13, ITF, GS1 Databar/Limited/Expanded, CODE128, EAN128	
Customisable label formats	999	
Label printing	Die-cut labels and/or continuous paper	
Max. printing width	56mm	
Max. printing height	200mm	
Stepper motor	Forward and backward drive	
Driving mechanism	Toothed belt	
Thermal head replacement	Ishida Quick Head Replacement (no tools required)	
MEDIA		
	Minimum	Maximum
Width	38mm	64mm (including backing paper)
Height	38mm	200mm
DISPLAY		
Operator side	7" colour touch panel	
Customer side	7" gray scale panel	
Type	4-wire resistive	
Max. pages	99	
Keyboard	Fully programmable category/ group/ function/ sub-total pages	
KEYBOARD		
Type	Membrane	
Numeric	0-9 keys, 00 key programmable	
MEMORY		
SRAM	4MB	
SDRAM	64MB	
Flash memory	32MB	
*USB	2GB	
PLU DATA SETTINGS		
Sales modes	Weight/ fixed price/ 100g/ weight and fixed price	
Dates	1 x Pack date, 2 x expiry dates	
Time	1 x Pack time, 2 x expiry times	
Other settings	Tare, VAT, department, group barcode format, traceability, fidelity points, deposit/link, 1st and 2nd label format, 3 images for printing, 1 display image, 1 safe handling image	
Traceability Type	I (manual input) and II (scanner input)	
BARCODE FORMATS		
Pr-defined	34 formats	
Customisable	Indefinite	
REPORTS		
Receipt totals	Daily/ weekly/ cumulative	
Pre-pack totals	Daily/ weekly/ cumulative	
Barcodes	EAN/UPC 8/12/13, ITF, GS1 Databar/Limited/Expanded, CODE128, EAN128	
Customisable label formats	999	
INTERFACES		
RS232C	1	
RJ485	1	
USB	1 (ver 1.0)	
Ethernet	1 (100Mbps auto-duplex)	
*Wi-Fi	1	
SCANNER		
*Barcode scanner	Serial or ethernet	
OPERATING VOLTAGE		
Range	100 - 240V 50/60Hz	
Permissible tolerance	+/- 10%	
OPERATIONAL ENVIRONMENT		
Range	Min. +5°C (41°F), Max. +35°C (95°F), 20% - 85% R.H.	
* Optional		